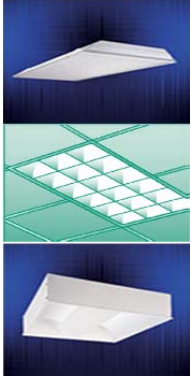









Table A: Lighting Systems Incentives

Product Code	Product Description	Per Fixture Incentive	Eligibility Criteria	
20L	<u>LED</u> High Efficiency Interior Fixtures	\$50	1x4, 2x2 and 2x4 Prismatic, Parabolic, Recessed Direct and Recessed Indirect fixtures Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	
21L	<u>LED</u> Linear Indirect or Indirect/Direct Pendant Fixtures	\$65	Fixtures may have a Down-Light component of no greater than 45%. Fixtures with a Down-Light component must incorporate glare limiting louvers or a perforated cover shielding the lamps. Ceiling finish must be white and unobstructed. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	
22L	<u>LED</u> Advanced Recessed Fixtures	\$50	Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	
30L	<u>LED</u> Industrial/Commercial Fixtures	\$50	4 ft. and 8ft. Fixtures LED industrial/commercial strip or wrap fixtures. Applies to fixtures installed 16 feet or less above the floor. Only one incentive may be counted per fixture. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	





2017 New Equipment & Construction Lighting



Product Code	Product Description	Per Fixture Incentive	Eligibility Criteria	
31L	<u>LED</u> Clean Room Rated or Vapor Tight Fixtures	\$65	1x4 or 2x4 Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	
32L	<u>LED</u> Stairwell Fixture with integral Occupancy sensor controls	\$65	To be eligible for incentives, fixtures must be installed in an 8,760 hour stairwell application with integral occupancy sensor control, setting lights to 50% or less output in control mode (not occupied). Not eligible for additional control incentive. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	
40L	<u>LED</u> High and Low Bay High Intensity Fixtures	\$100	Wattage range is 35 watts to 149 watts. Recommended mounting height is > 16 feet above the floor. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	
41L	<u>LED</u> High and Low Bay High Intensity Fixtures	\$150	Minimum Wattage is 150 watts. Recommended mounting height is > 16 feet above the floor. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)	






2017 New Equipment & Construction Lighting



50L	<p style="text-align: center;"><u>LED</u> Down Light Fixtures</p>	\$20	<p>Eligible LED Down Lights are required to be less than 25 watts and hardwired or GU-24 (pin) base. Screw Base LED Down Light <u>Retrofit Kits</u> are also eligible. <u>Replacement lamps not eligible.</u></p> <p style="text-align: center;">Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)</p>	
Product Code	Product Description	Per Fixture Incentive	Eligibility Criteria	
51L	<p style="text-align: center;"><u>LED</u> Hardwired Track Heads or Mono-Point Directional Fixtures</p>	\$20	<p>LED track heads hardwired installations only, <u>replacement lamps not eligible.</u></p> <p style="text-align: center;">Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org).</p>	
60L	<p style="text-align: center;"><u>LED</u> Cooler , Freezer, or Refrigerated 3' & 4' Fixture</p>	\$30	<p>Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)</p>	
61L	<p style="text-align: center;"><u>LED</u> Cooler , Freezer, or Refrigerated 5' & 6' Fixture</p>	\$45	<p>Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org)</p>	


2017 New Equipment & Construction Lighting



70L	<u>LED</u> Low Bay Fixtures Garage & Canopy	\$50	LED Low Bay for Garages and Canopies 25-99 watts. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org).	
71L	<u>LED</u> Low Bay Fixtures Garage & Canopy	\$75	LED Low Bay for Garages and Canopies greater than 99 watts. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org).	
Product Code	Product Description	Per Fixture Incentive	Eligibility Criteria	
80L	<u>LED</u> Exterior Wall, Post, Ground, and Arm Mount Floods and Fixtures	\$50	Must be automatically controlled to avoid daylight operation. Wattage range is 25 watts to 99 watts Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org).	
81L	<u>LED</u> Exterior Wall, Post, Ground, and Arm Mount Floods and Fixtures	\$75	Must be automatically controlled to avoid daylight operation. Minimum wattage is 100 watts Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org).	
90L	<u>LED</u> Pole Mounted Parking, or Roadway Fixtures	\$100	Must be automatically controlled to avoid daylight operation. Wattage range is 45 watts to 149 watts. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org).	

2017 New Equipment & Construction Lighting






<p>91L</p>	<p><u>LED</u> Pole Mounted Parking, or Roadway Fixtures</p>	<p>\$150</p>	<p>Must be automatically controlled to avoid daylight operation. Minimum Wattage is 150 watts. Fixtures are required to be listed by Design Lights Consortium (for more information see www.designlights.org).</p>	
<p>99L</p>	<p>LED New Fixtures</p>	<p>\$15</p>	<p>LED fixture categories not covered under other codes. Fixtures are required to be listed by Design Lights Consortium or ENERGY STAR. (for more information see www.designlights.org). Linear LED Tubes (T8 style) <u>not</u> eligible for code 99L</p>	

2017 New Equipment & Construction Lighting

Please note that only one incentive control strategy will be approved per fixture/area.

Table A-1: Lighting Control Incentives

Product Code	Product Description	Incentive	Eligibility Criteria	Min Controlled Wattage	
1	Remote Mounted Occupancy Sensor	\$50 per control	Only for customers under 5000 sq-ft. Comply with manufacturer's coverage recommendations. No manual "ON" overrides.	90 (total)	
2	Wall mounted Occupancy/Vacancy Sensors	\$20 per control	Only for customers under 5000 sq-ft. Occupancy Sensors must operate as Automatic On, and Automatic Off or Manual On and Off. Sensors are wall mounted devices only. Not recommended in multi stall restrooms, locker rooms, stairwells or rooms of greater than 250 square feet.	45 (total)	
3	Daylight Dimming System and/or Occupancy Controlled Step-Dimming System	\$20 per fixture	Only for customers under 5000 sq-ft. Daylight: Must have continuous dimming or adjust to a minimum of 4 levels. Step-Dimming: LED's must be automatically controlled based on occupancy. Power consumption in low mode must not exceed 60%.	45 (per fixture)	
4	Integral High Bay Fixture Occupancy Control Systems	\$20 per fixture	Only for customers under 5000 sq-ft. LED's must be automatically controlled based on occupancy. Systems with manual "ON" or override switches are not eligible. Occupancy sensors are integral (built into) or permanently attached to each fixture.	45 (per fixture)	